




# > aWR8

Receptor multi-compatibility  
Excellent blackness  
Competitiveness

**AWR®8 is the standard ribbon from the inkanto wax range.**


It doesn't make any compromise to quality and printing performance and therefore matches all criteria expected by a traditional wax application.

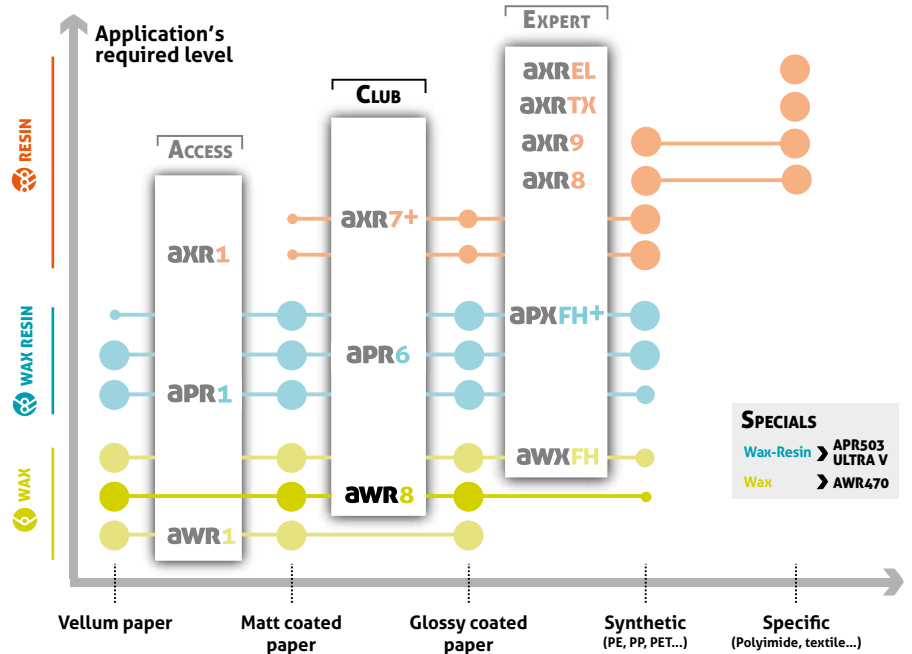


## Printing receptor

papers	synthetics
Vellum ●●●	PP ●○○
Coated ●●●	PE ●○○
Glossy coated ●●●	PET ●○○

## Printer settings

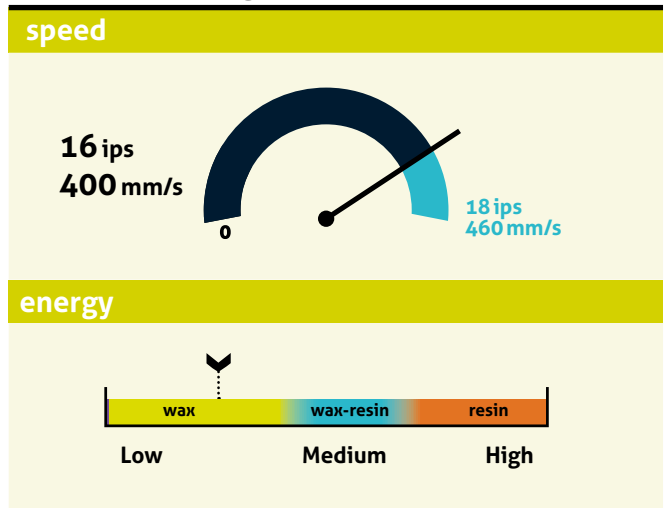

## Print resistance

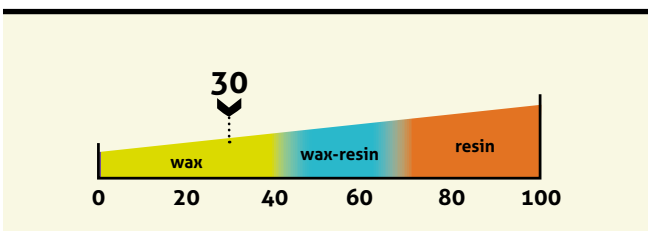

## Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

## Your ribbon identity

Colours: ● ● ● ● ●

Length (m): .....

Width (mm): .....

Part number: .....

Your distributor: .....

Contact: .....



# > aWR8

## Application fields



## Product performance

print quality					
90°Barcode		A <sub>a</sub> Small characters		Logos	
0°Barcode		2D Barcode		Blackness	
technical resistances					
Heat		Light/Blue Wool		Solvents	
Water/Submerge		Rubbing			

## Product physico-chemical features

product structure	
<b>PET film</b>	Thickness: 4,5 µm
<b>Ink</b>	Wax
Melting point	65°C/149°F
<b>Backcoating</b>	Silicon based
Coefficient of Friction	Kd < 0.2
<b>Ribbon thickness</b>	< 9 µm
The ribbon is anti static build-up treated	

## Storage

### storage conditions

12 months recommended  
20-80 % Humidity Rate, 5-35°C (40-95°F)

## Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.